

Rosemary Inn, Honeyeuckle Cabin (Bldg. No. 377)
Olympic National Park
Barnes Point, Lake Crescent
Port Angeles Vicinity
Clallam County
Washington

HABS No. WA-135-F

HABS
WASH
5-POAN.V,
2F-

PHOTOGRAPHS

WRITTEN HISTORICAL AND DESCRIPTIVE DATA



Historic American Building Survey
National Park Service
Western Region
Department of the Interior
San Francisco, California 94107

HABS
WASH
5-POAN.V,
2F-

NATIONAL PARK SERVICE
Department of the Interior

HISTORIC AMERICAN BUILDING SURVEY
ARCHITECTURAL DATA FORM

STATE WASHINGTON	COUNTY CLALLAM	TOWN OR VICINITY Approximately 20 miles southwest of Port Angeles
HISTORIC NAME OF STRUCTURE (include source for name) Rosemary Inn, "Honeysuckle" Cabin		HABS NO. WA-185-F
SECONDARY OR COMMON NAMES OF STRUCTURE Bldg. No. 377		
COMPLETE ADDRESS (for rural sites describe location) Barnes Point, south shore of Lake Crescent, north side of Hwy 101, approximately 20 miles from Port Angeles, in Olympic National Park.		
DATE OF CONSTRUCTION (include source) Mid-to-late 1920s (Historic Building Inventory)	ARCHITECT(S) (include source) Builder and Craftsman: John Daum (HRS, 1983)	
SIGNIFICANCE (architectural and historical, include original use of structure) This cabin was constructed as an integral part of the Rosemary Inn Complex. It contributes to the overall character of the rustic, picturesque resort ensemble and possesses integrity of design, materials, workmanship, location, setting, feeling and association.		
STYLE (if appropriate) Craftsman-style cottage		
MATERIAL OF CONSTRUCTION (include structural systems) Wood-frame construction set on 6 x 6 wood posts on concrete piers and blocks.		
SHAPE AND DIMENSIONS OF STRUCTURE (sketched floor plans on separate sheet acceptable) Irregular: approx. 13' x 19' with a 5' x 9' addition on east facade.		
EXTERIOR FEATURES OF NOTE 1-story; wood-shingled gable roof with exposed rafter ends and slightly extended eaves; shed-roof extension off south facade forms entry overhang supported by peeled logs; wood shingle siding with vertical wood boards at gable ends; hip-roofed bay window on west has tri-partite diamond pane casement sash supported by 3 knee braces; multi-paned casement and hinged sash with plain surrounds; horizontal wood skirting; plain fascia boards; entry has boxed wood shingle rail and lattice as screening.		
INTERIOR FEATURES OF NOTE (describe floor plans if not sketched) Painted floor boards; tongue-and-groove bevelled siding on ceiling; vertical tongue-and-groove painted wainscotting on walls with unpainted horizontal T and G above.		
MAJOR ALTERATIONS AND ADDITIONS, WITH DATES Bathroom (on east facade) may be addition; under rehabilitation (1988)		
PRESENT CONDITION AND USE Fair; Vacant		
OTHER INFORMATION AS APPROPRIATE		
SOURCES OF INFORMATION (include listing on National Register, State Registers, etc.) Historic Structure Report, 1986 Historic Resource Study, 1983 Historic Building Inventory, 1983 National Register Listing, 1979		
COMPILER, AFFILIATION Gretchen A. Luxenberg, National Park Service	DATE July, 1988	

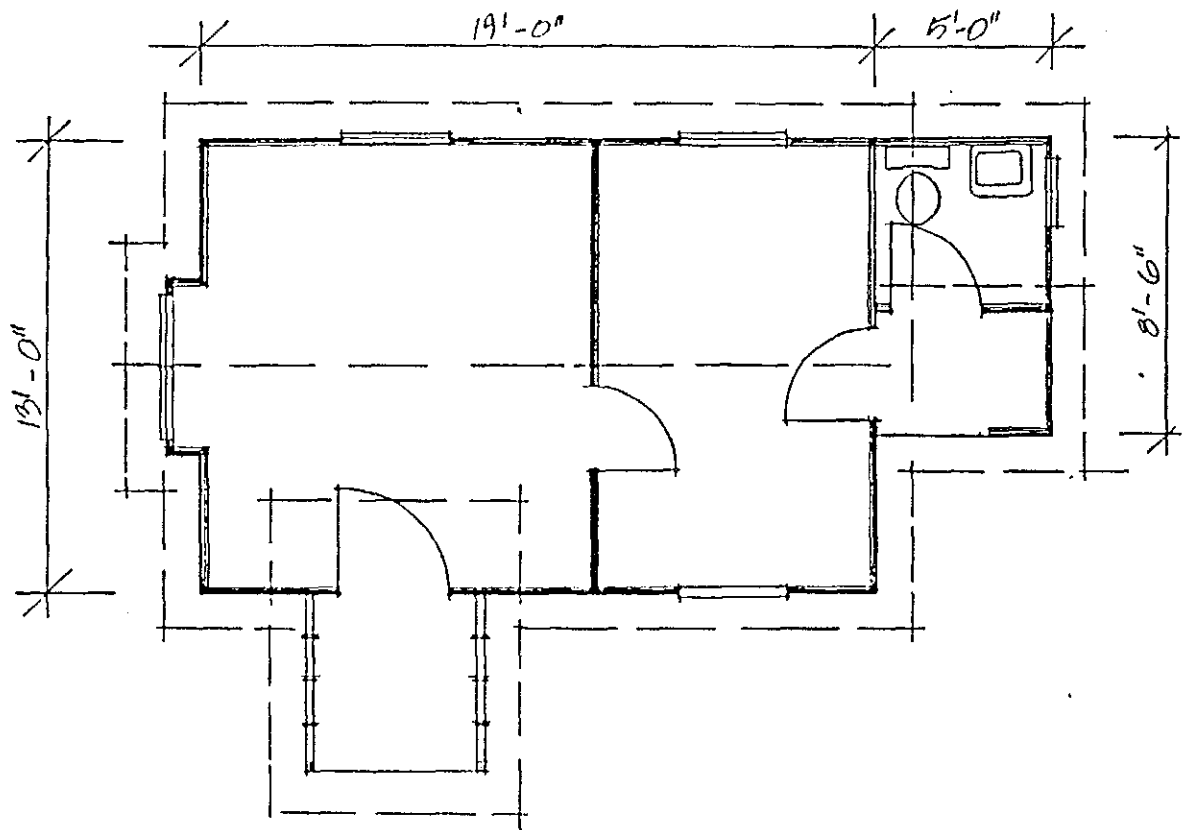

Honeysuckle Building #377